

OPEN CONDENSING UNITS

PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins



TECH DATA

OMC92-1L

UNIT MODEL	OMC92-1L
STOCK CODE	AGD0313
COMPRESSOR TYPE	Embraco Hermetic Reciprocating

COMPRESSOR			FANS		
MODEL	DISP.	NOM. HP	QTY	SIZE	POLES
NJ2192GJ	26.2	1-1/4	1	300	4

AMBIENT °C	R404A COOLING CAPACITY (w)				
	-30	-25	-23.3	-20	-15
35°C	931	1221	1342	1542	1918
40°C	866	1162	1281	1475	1840
45°C	823	1104	1217	1401	1748


Ratings based on 11 k suction superheat/3k subcooling
 For 38° ambient ratings - multiply 35° by 0.94
 For 43° ambient ratings - multiply 40° by 0.94

Accumulator option recommended for low temp where the pipe run is less than 6m.
 Fan speed control option is recommended for low temp and R134a applications.

ELECTRICAL						
COMPRESSOR		FAN			OVERALL	
VOLT.	MRA	VOLT.	MRA (EACH)	MRA (TOTAL)	VOLT.	MRA
240	5.8	240	0.42	0.42	240	6.22

DIMENSIONS (MM)					CONNECTIONS	
(W)	(D)	(H)	KG	(P)	LIQUID	SUCTION
550	600	450	TBC	300	1/4	1/2

NOISE		RECEIVER	FITTED HP/LP
dB(A) -10m	dB(A) -3m	VOLUME (L)	
44	54	1	Manual/Auto

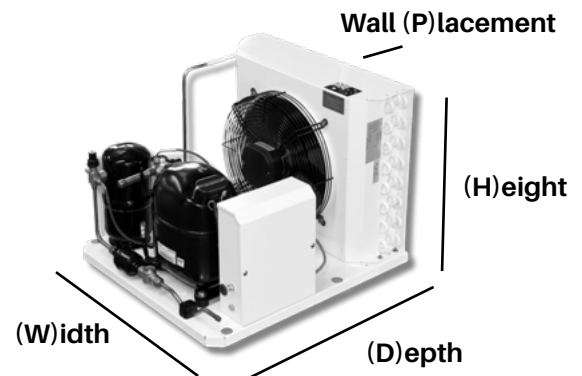

FITTED WITH	AVAILABLE OPTIONS
<ul style="list-style-type: none"> • Drier & sight glass • HPLP 	<ul style="list-style-type: none"> • Fan speed control • Isolator • Suction accumulator • Oil separator • Solenoid valve • Fully enclosed unit

Please note additional fitted options may change the unit dimensions.

OPEN CONDENSING UNITS

PRODUCT FEATURES

- Easy install
- Fully wired
- Local parts
- Custom options
- Built to last
- Large condensers
- Powder coated
- Blue fins



TECH DATA

OMC12-1L

UNIT MODEL	OMC12-1L
STOCK CODE	AGD0323
COMPRESSOR TYPE	Embraco Hermetic Reciprocating

COMPRESSOR			FANS		
MODEL	DISP.	NOM. HP	QTY	SIZE	POLES
NJ2212GK	34.4	1-1/2	1	350	4

AMBIENT °C	R404A COOLING CAPACITY (w)				
	-30	-25	-23.3	-20	-15
35°C	1309	1709	1883	2213	2748
40°C	1219	1631	1804	2114	2658
45°C	1158	1549	1714	2008	2525


Ratings based on 11 k suction superheat/3k subcooling
For 38° ambient ratings - multiply 35° by 0.94
For 43° ambient ratings - multiply 40° by 0.94

Accumulator option recommended for low temp where the pipe run is less than 6m.
Fan speed control option is recommended for low temp and R134a applications.

ELECTRICAL						
COMPRESSOR		FAN			OVERALL	
VOLT.	MRA	VOLT.	MRA (EACH)	MRA (TOTAL)	VOLT.	MRA
240	8.1	240	0.65	0.65	240	8.75

DIMENSIONS (MM)					CONNECTIONS	
(W)	(D)	(H)	KG	(P)	LIQUID	SUCTION
550	600	500	TBC	350	3/8	5/8

NOISE		RECEIVER	FITTED HP/LP
dB(A) -10m	dB(A) -3m	VOLUME (L)	
48	58	2	Manual/Auto

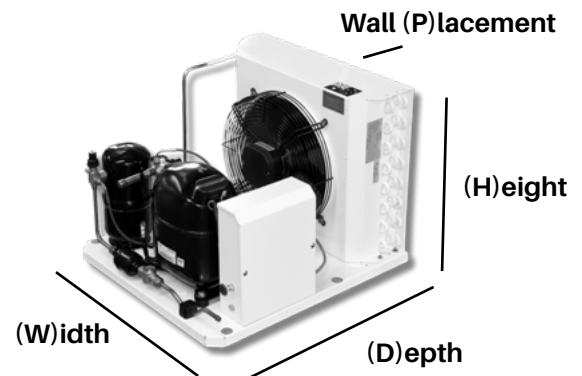

FITTED WITH	AVAILABLE OPTIONS
<ul style="list-style-type: none"> • Drier & sight glass • HPLP 	<ul style="list-style-type: none"> • Fan speed control • Isolator • Suction accumulator • Oil separator • Solenoid valve • Fully enclosed unit

Please note additional fitted options may change the unit dimensions.