


# EVAPORATORS HEB SERIES

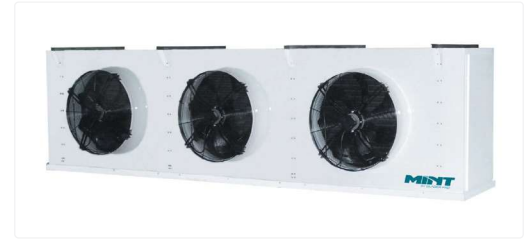

## MEDIUM TEMP 4.5MM FIN SPACING

STOCK CODE	MODEL	CAPACITY R404A/R449A kW		FAN		VOLT 50 Hz	AIR FLOW M3/Hr	AIR THROW M	TX VALVE	PIPE CONNECTIONS		WEIGHT KG	DIMENSIONS mm			ELECTRIC DEFROST HEATERS AMPS
		-5SST @6K	-5SST @8K	SIZE	QTY x AMPS					INLET	OUTLET		WIDTH	DEPTH	HEIGHT	
ASK1000	HEB50021064.5	15.65	20.86	500	2 x 1.55	415	19019	28	EXT	5/8	1 5/8	138	2463	753	655	-
ASK1020	HEB50021594.5	19.83	26.43	500	2 x 1.55	415	18639	27	EXT	5/8	1 5/8	171	2463	753	655	-
ASK1040	HEB50031594.5	23.32	31.09	500	3 x 1.55	415	28529	30	EXT	5/8	2 1/8	201	3492	753	655	-
ASK1060	HEB50032394.5	29.59	39.45	500	3 x 1.55	415	27959	29	EXT	5/8	2 1/8	294	3492	753	655	-
ASK1080	HEB50042184.5	31.74	42.32	500	4 x 1.55	415	38038	32	EXT	5/8	2 1/8	263	4522	753	655	-
ASK1100	HEB50043274.5	39.42	52.56	500	4 x 1.55	415	36328	31	EXT	5/8	2 1/8	395	4522	753	655	-
ASK1120	HEB55044334.5	49.02	65.37	550	4 x 1.78	415	38190	32	EXT	7/8	2 1/2	492	4565	865	900	-
ASK1140	HEB63035814.5	73.47	97.96	630	3 x 1.98	415	37580	32	EXT	2 x 7/8	2 x 2 1/2	576	4135	920	1000	-
ASK1160	HEB63047784.5	92.11	122.81	630	4 x 1.98	415	50110	34	EXT	2 x 7/8	2 x 2 1/2	764	5365	920	1300	-

## LOW TEMP 7MM FIN SPACING

STOCK CODE	MODEL	CAPACITY R404A/R449 kW		FAN		VOLT 50 Hz	AIR FLOW M3/Hr	AIR THROW M	TX VALVE	PIPE CONNECTIONS		WEIGHT KG	DIMENSIONS mm			ELECTRIC DEFROST HEATERS AMPS
		-25SST @6K	-25SST @7K	SIZE	QTY x AMPS					INLET	OUTLET		WIDTH	DEPTH	HEIGHT	
ASK1440	HEB5002697D	11.92	13.91	500	2 x 1.55	415	20020	25	EXT	5/8	1 5/8	124	2463	753	655	27.95
ASK1460	HEB50021037D	15.74	18.36	500	2 x 1.55	415	16920	24	EXT	5/8	1 5/8	150	2463	753	655	33.54
ASK1480	HEB50031037D	17.53	20.45	500	3 x 1.55	415	30030	27	EXT	5/8	2 1/8	180	3492	753	655	38.55
ASK1500	HEB50031567D	23.49	27.40	500	3 x 1.55	415	29430	26	EXT	5/8	2 1/8	218	3492	753	655	46.27
ASK1520	HEB50042097D	31.45	36.70	500	4 x 1.55	415	38240	28	EXT	5/8	2 1/8	353	4522	753	655	61.59
ASK1540	HEB55042787D	37.91	44.23	550	4 x 1.78	415	40200	29	EXT	7/8	2 1/2	432	4565	865	900	61.59
ASK1560	HEB63045007D	74.25	86.62	630	4 x 1.98	415	52750	31	EXT	2 x 7/8	2 x 2 1/8	658	5365	920	1300	109.73

Air flow affected by room conditions

